

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

CORRECTED VERSION

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
16 October 2003 (16.10.2003)

PCT

(10) International Publication Number  
WO 2003/085346 A1

(51) International Patent Classification<sup>7</sup>: F28D 20/02, C09K 5/06

(74) Agents: BURLESON, David et al.; Omnova Solutions Inc., Legal Department, 175 Ghent Road, Fairlawn, OH 44333-3300 (US).

(21) International Application Number:  
PCT/US2003/009902

(81) Designated States (*national*): AU, BR, CN, IL, IN, JP, NZ, US, ZA.

(22) International Filing Date: 1 April 2003 (01.04.2003)

(25) Filing Language: English

(84) Designated States (*regional*): Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(26) Publication Language: English

(30) Priority Data: 0207642.0 2 April 2002 (02.04.2002) GB

Published:  
— with international search report

(71) Applicants (*for all designated States except US*): OMNOVA WALLCOVERING (UK) LIMITED [GB/GB]; 74-78 Wood Lane End, Hemel Hempstead, Hertfordshire HP2 4RF (GB). OMNOVA SOLUTIONS INC. [US/US]; 175 Ghent Road, Fairlawn, OH 44333-3300 (US).

(48) Date of publication of this corrected version:  
27 May 2004


(72) Inventors; and

(75) Inventors/Applicants (*for US only*): MARSHALL, Allan [GB/GB]; Ringle House Cranbrook Road, Hawkhurst, Kent TN18 5EF (GB). CORNER, Terence [GB/GB]; 19 The Middlings, Sevenoaks, Kent TN13 2NN (GB).

(15) Information about Correction:  
see PCT Gazette No. 22/2004 of 27 May 2004, Section II

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: WALL LINING

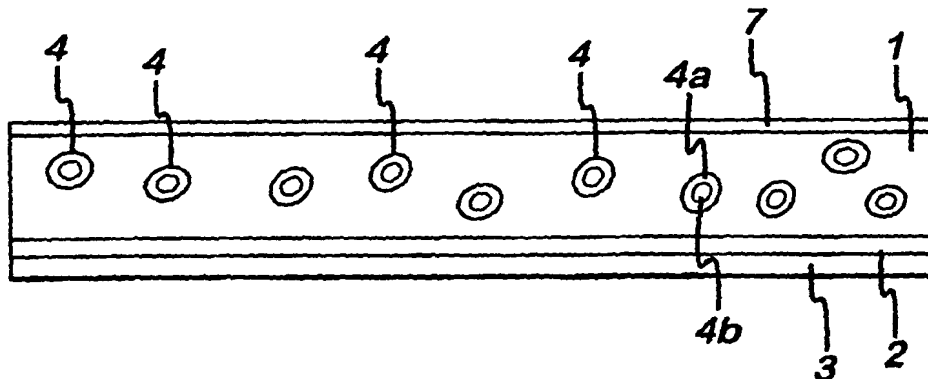

(57) Abstract: A flexible wall lining includes a body layer (1) comprising one or more phase change materials (4) that each exhibit a phase change at a temperature in the range from 5° to 40°C. The wall lining preferably is provided in the form of a sheet that can be attached to a building wall (5) either at the time of construction or, advantageously, at a time when the building is being renovated or redecorated.

WO 2003/085346 A1